


# Tag Regular for Machine or Staff

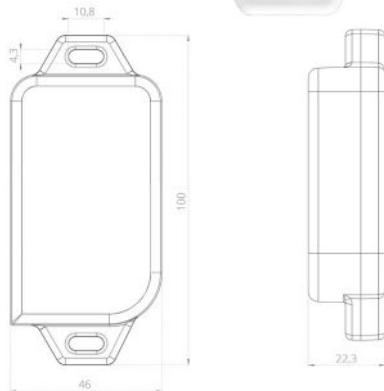


Dimensions in mm

## Specifications

- | Specifications   |  |
|--|--|
| <ul style="list-style-type: none"><li>• High accuracy up to 0.1m</li><li>• Long RTLS Range up to 30m</li><li>• UWB IEEE 802.15.4z standard</li><li>• Firmware upgradeable via USB-C</li><li>• Built-in accelerometer</li><li>• LED visual indicator (Red and green)</li><li>• Data memory : 5000 alerts (can be downloaded with mobile app or network gateway)</li><li>• Dimensions: 100x46x22mm</li><li>• IP40 (IP54 with USB cap option)</li><li>• Resistant to hydro alcoholic gel</li><li>• 1800 mAh LiPo rechargeable battery</li></ul> | <ul style="list-style-type: none"><li>• Autonomy of minimum 8h</li><li>• USB-C charging</li><li>• Designed and manufactured in EU</li><li>• 1 year warranty</li><li>• 68g weight</li><li>• Operating temperature -30 to +60°C</li><li>• CE and FCC Certified</li><li>• Small vibration motor for haptic feedback</li><li>• Compatible with armband, helmet, lanyard, belt-clip</li></ul> |

# Tag Mini for Staff

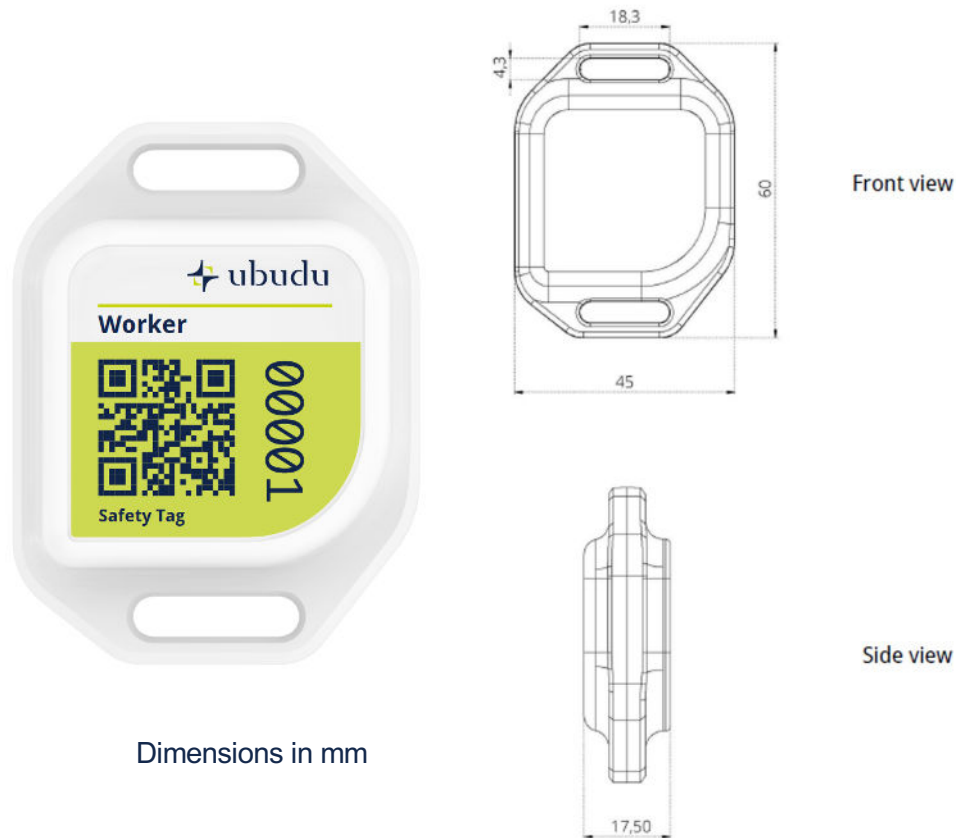

Specifications	
<ul style="list-style-type: none"><li>• High accuracy up to 0.1m</li><li>• Long RTLS Range up to 30m</li><li>• UWB IEEE 802.15.4z standard</li><li>• Firmware upgradeable via USB-C</li><li>• Built-in accelerometer</li><li>• LED visual indicator (Red/Green)</li><li>• Data Memory : 5000 last alerts (can be downloaded with mobile app or network gateway)</li><li>• Dimensions: 60x45x18 mm</li><li>• IP40 (IP54 with USB cap option)</li><li>• Resistant to hydro alcoholic gel</li><li>• 750 mAh Lipo rechargeable battery</li></ul>	<ul style="list-style-type: none"><li>• Autonomy of minimum 8h</li><li>• USB-C charging</li><li>• Designed and manufactured in EU</li><li>• 1 year warranty</li><li>• 38g weight</li><li>• Operating temperature -30 to +60°C</li><li>• CE &amp; FCC certified</li><li>• Small vibration motor for haptic feedback</li><li>• Compatible with wristband, helmet, lanyard and armband</li></ul>