



Optimized Size and Shape for Apparel Applications

SMARTRAC's WEB inlays and tags are designed for the unique identification of items such as apparel and electronics. They are particularly suitable for item-level retail applications, offering high performance and best-in-class orientation sensitivity.

WEB products are compact and ideally shaped for use as apparel hang-tags, providing high read reliability with optimum performance, resulting in low fixed infrastructure and total applied costs. Retailers and brand owners can deploy these solutions globally for apparel, as they comply with current frequency regulations in the US (FCC), EU (ETSI) and Asia. SMARTRAC's WEB inlays and tags can be easily converted into hang-tags or care labels, and are available in dry, wet and paper tag delivery formats.

They are equipped with the Impinj Monza R6 and Monza R6-P chip that features an Autotune function, which helps WEB to work at peak efficiency, even in rapidly changing environments. WEB inlays and tags with the Monza R6 chip offer unique TID and enable pre-serialized EPC. Inlays with Monza R6-P offer additional features such as add-on user memory and on-demand memory configuration as well as a kill function and easy access control to change tag information for store data, if required.

Additionally, the inlays and tags are suitable for full integration into the SMART COSMOS Cloud Services platform.

SMARTRAC's inlays and tags are compliant with ISO 9001:2008 Quality Management and ISO 14001:2004 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, especially in the retail environment.

860 - 960 MHz

Impinj Monza R6 & R6-P

50 x 30 mm (1.97 x 1.18 in)

54 x 34 mm (2.13 x 1.34 in)


EPC Class 1 Gen 2
ISO 18000-6C

Brand protection
Retail
Supply chain management


Optimized Size and Shape for Apparel Applications

IC	Impinj Monza R6	Impinj Monza R6-P
Memory	96 bit	128/96 bit user memory configuration - default: 128 bit EPC + 32 bit user memory - arrange to: 96 bit EPC + 64 bit user memory
Frequency	860-960 MHz	
Antenna Size	50 x 30 mm / 1.97 x 1.18 in	
Die-Cut Size	54 x 34 mm / 2.13 x 1.34 in	
Web Width	60 mm / 2.4 in	
Operating Temperature	-40 °C to +85 °C / -40 °F to +185 °F	
Delivery Format	dry, wet and paper tag	
Adhesive	Acrylic, water borne adhesive	
Qty/Reel	8,000 pcs	
Core Size	76 mm / 3 in	
Shelf Life	+20 °C, 50 % RH / 68 °F, 50 % RH - minimum 2 years from the date of manufacturing	

Read Range (m)

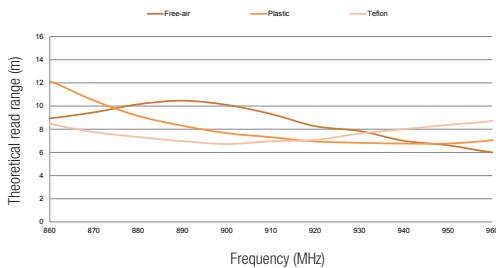

Orientation Sensitivity

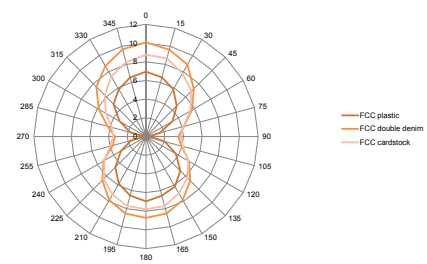

All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level.

Phone: +31 20 30 50 150 · Fax: +31 20 30 50 155 · info@smartrac-group.com

www.smartrac-group.com/contact



© 2017 SMARTRAC N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

