



LoRa Smart Tag

Small & portable device
which pinpoints the
location of its bearer

Key features

- Compatible with Ubudu BLE V1 (uplink) & V2 (downlink) setups
- Firmware upgradeable
- Built-in accelerometer
- LED visual indicator
- Attachable form factor
- 46+ months autonomy depending on scenario
- Powered by 2000mAh battery rechargeable via USB-C
- Designed & manufactured in EU
- Each unit carefully tested
- 1 year warranty
- Dimensions 100 x 46 x 22.3mm
- 68g weight
- IP40 ready for industrial areas
- IP63 optional
- Operating temperature: -20°C ÷ 40°C (LiPo)
- Available in white
- Accessories for IP67:




LoRa Smart Tag

Small & portable device
which pinpoints the
location of its bearer

Key LoRa features

- Minimum frequency of update
- Maximum frequency to be in line with Fair Access Policy
- Duty Cycle at 1%
- Spreading factor
- Payload size
- Frequencies
- Accelerator settings options
- LoRa network access method

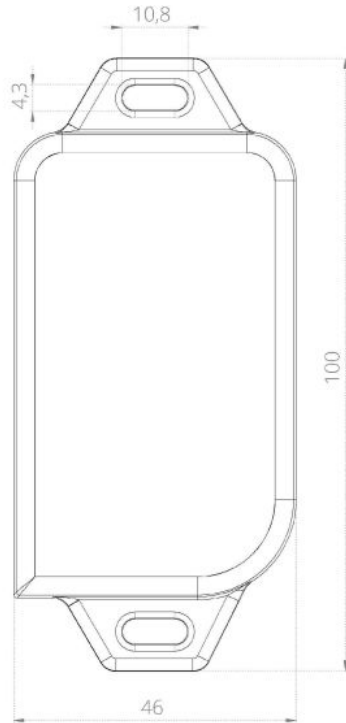

Front view



Side view